


PU02-4 Interface Converter USB/RS485

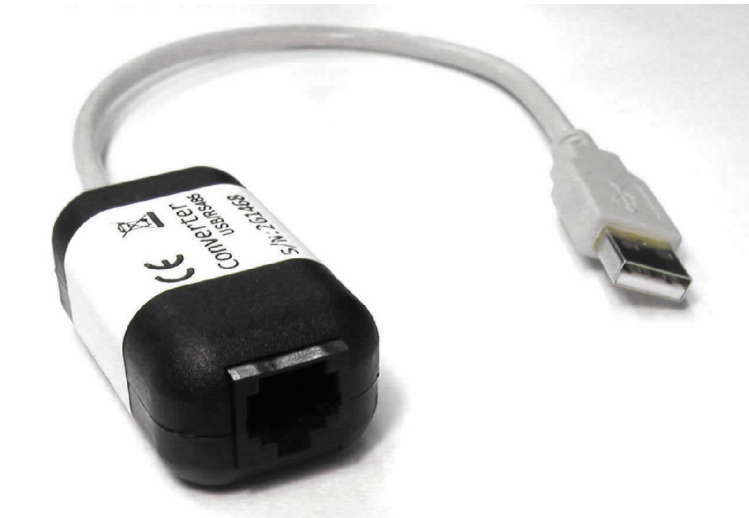

Enables the connection of devices with RS485 interface to USB ports

- Without optical isolation
- USB 1.1 and USB 2.0 compatible
- Powered by USB port
- Automatic control of data direction
- Speed limited to 250 kbps reduced EMI
- ESD protection 15 kV
- RS485 Driver Overload Protection
- Fail Safe Biasing
- Terminating resistor 130R
- Drivers for Windows, Linux, Mac at: www.ftdichip.com/FTDriver.htm

RJ45 Connector Pin Assignment:

- 1 -GND RS485
- 2 -GND RS485 (connect with PC ground by protection resistor)
- 3 -B (Invert RS485)
- 4 -NC
- 5 -NC
- 6 -A (Non Invert RS485)
- 7 -NC
- 8 -NC